



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : D21G 7/00, F16F 15/00		A1	(11) International Publication Number: WO 98/49394
			(43) International Publication Date: 5 November 1998 (05.11.98)
(21) International Application Number: PCT/FI98/00355		(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 22 April 1998 (22.04.98)			
(30) Priority Data: 971864 30 April 1997 (30.04.97) FI			
(71) Applicant (for all designated States except US): VALMET CORPORATION [FI/FI]; Panuntie 6, FIN-00620 Helsinki (FI). <i>For the inventor's name, see the Finnish application.</i>			
(72) Inventors; and			
(75) Inventors/Applicants (for US only): KARHUNEN, Jouko [FI/FI]; Keskussairaalan tie 16 A, FIN-40630 Jyväskylä (FI). PURANEN, Arto [FI/FI]; Syrjälänkatu 6 A 56, FIN-40700 Jyväskylä (FI). KOLIÖ, Jorma [FI/FI]; Veräjätie 1, FIN-40530 Jyväskylä (FI). LEHTOVIRTA, Esa [FI/FI]; Raitatie 12, FIN-40250 Jyväskylä (FI). HIETAMÄKI, Erkki [FI/FI]; Okkerinkatu 8, FIN-40700 Jyväskylä (FI).			
(74) Agent: FORSSÉN & SALOMAA OY; Yrjönkatu 30, FIN-00100 Helsinki (FI).			


Published

With international search report.

With amended claims.

In English translation (filed in Finnish).

(54) Title: METHOD AND EQUIPMENT FOR ATTENUATION OF OSCILLATION IN A PAPER MACHINE OR IN A PAPER FINISHING DEVICE

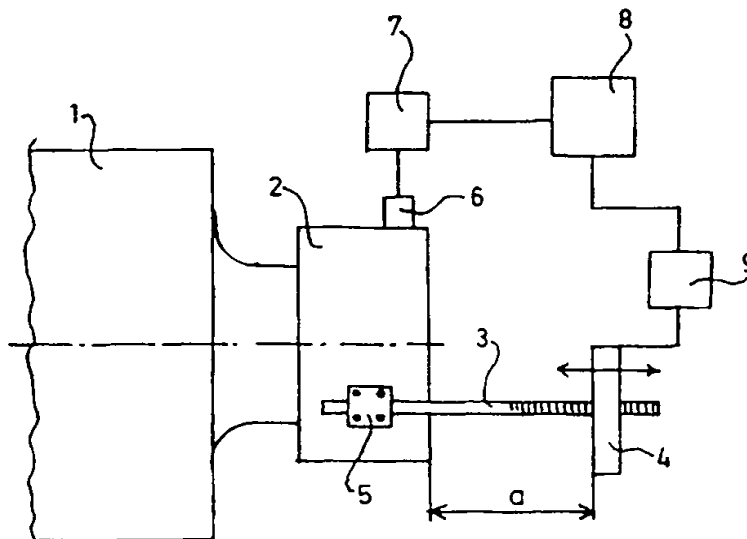

(57) Abstract

The invention relates to a method for damping vibration in a paper machine or in a paper finishing device by means of a dynamic damper which comprises an additional weight suspended from a vibrating object by means of a spring. In the method, the spring constant of the spring (3) of the dynamic damper and/or the mass (4) of the dynamic damper is/are changed by means of a control device (9) in order to tune the natural frequency of the dynamic damper. In an advantageous application of the invention, the vibration induced by rolls (1) which are in nip contact is damped by means of the damper so that the damper is tuned to a frequency that is substantially equal to a multiple of the rotational frequency of the roll that is closest to the natural frequency of the vibrating system. The invention also relates to an apparatus.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Method and equipment for attenuation of oscillation in a paper machine or in a paper finishing device

5

The invention relates to a method and an apparatus for damping vibration in a paper machine or in a paper finishing device by means of a dynamic damper which comprises an additional weight suspended from a vibrating system by means of a spring.

10

In paper machines and in paper finishing devices, vibrations constitute a major problem and, in present-day systems, when attempts are being made to achieve ever higher speeds, the vibration problems have become still more apparent than before. There are several possible sources of vibration in paper machines, and some of the most significant of them are rolls and cylinders, which comprise a very great mass revolving at a considerable speed. It is clear, of course, that when rolls are manufactured, attempts are being made to make their measurement precision as good as possible and, in addition, they are balanced in order to eliminate the vibrations.

15

However, present-day paper machines and paper finishing devices increasingly employ rolls provided with a soft coating, which rolls in operation may form a very significant source of vibration. Such rolls are used, for example, in on-line and off-line calenders, coating machines, size presses, supercalenders and equivalent, where said roll provided with a soft coating forms a nip with another roll. A paper web and possibly a felt, wire or equivalent is passed through the nip. When in this kind of nip roll arrangement, the seam of the wire, felt or web, considerable impurities or something else causing a noticeable change in the thickness of the web travelling through the nip, passes/pass through the nip during running, the coating must yield elastically, with the result that the coating serves as a spring that excites vibration. For example, in a size press and in a coating device of the size press type, the nip is defined by means of two rolls such that one nip roll is mounted by means of bearing housings directly on the frame structure of said device, while the opposite

25

30

roll is mounted at its bearing housings on loading arms that are attached by means of articulated joints to the frame structure of the machine. In that case, the roll mounted on the loading arms in particular begins to vibrate, in which connection the coating of the soft-faced roll is deformed, with the result that the vibration increases and the roll begins to resonate. Until now, it has been necessary to take care of and to eliminate such vibrations so that, by changing the running speed of the machine, such a running speed has been sought that, at said running speed, the vibration does not grow any stronger but begins to be attenuated. The vibration problems have prevented the use of certain speeds.

10

An object of the present invention is to provide a novel method and apparatus for damping vibrations that are being created such that the vibration can be damped by means of said method and apparatus without changing the running speed. The invention is based on the use of a dynamic damper, and the method in accordance with the invention is mainly characterized in that, in the method, the spring constant of a spring of the dynamic damper and/or the mass of the dynamic damper is/are changed by means of a control device in order to tune the natural frequency of the dynamic damper.

15

20 The apparatus in accordance with the invention is, in turn, characterized in that the apparatus comprises a control device which is arranged to change the spring constant of a spring of a dynamic damper and/or the mass of the dynamic damper in order to tune the natural frequency of the dynamic damper.

25

In an advantageous application of the invention, the vibration induced by rolls that are in nip contact is damped by means of the dynamic damper such that the damper is tuned to a frequency that is substantially equal to a multiple of the rotational frequency of the roll that is closest to the natural frequency of the vibrating system. The dynamic damper can also be tuned substantially directly to a frequency that corresponds to the problematic excitation frequency of a vibrating system.

30

In one advantageous embodiment of the invention, in the method, the vibration frequencies of a vibrating system are measured constantly by means of one or more vibration detectors, the measurement signals given by the vibration detector are amplified by means of an amplifier and fed into a vibration analyser which identifies the problematic excitation frequency and converts said problematic excitation frequency into a control signal which is fed into a control device in order to tune the dynamic damper.

In one application of the invention, the spring of the dynamic damper is a rod fixed at one end thereof to a vibrating system, such as, for example, a bearing housing of a roll, in a substantially horizontal direction, on support of which rod an additional weight is mounted. In that case, the control device may be arranged to change the spring constant of the spring of the dynamic damper by changing the position of the additional weight on said rod.

Preferably, a locking means is fitted on the rod serving as the spring of the damper in order to lock the additional weight in place after the tuning frequency of the damper has been made as desired. The rod and the additional weight disposed on the rod may be provided with threads fitting each other so that the position of the additional weight on the rod may be adjusted by rotating said additional weight on the rod. In this kind of arrangement, the locking means is arranged to act in the axial direction of the rod and to produce an axial force acting on the additional weight in order to provide a frictional force necessary for locking between the matching threads on the rod and on the additional weight.

The locking means is preferably a pneumatically operated piston device which is fixed on the rod and which is telescopic in order to provide the necessary stroke length.

In one embodiment of the invention, the additional weight included in the dynamic damper comprises a container suspended from the spring and filled with a liquid, the amount of the liquid in said container being adjustable in order to regulate the mass.

In that connection, the control device is connected, for example, to a pump and a valve in order to regulate the amount of the liquid.

5 In one embodiment of the invention, the rod serving as the spring of the dynamic damper is made of memory metal. In this case, the natural frequency of the damper is arranged to be tuned by regulating the temperature of the rod made of a memory metal material by means of electric resistors or equivalent heaters. In this kind of embodiment of the invention, the additional weight can be attached to the rod rigidly and without a clearance, thereby providing a simpler construction in this respect.

10

The invention provides a significant advantage over prior art especially in that vibration is damped by means of the method and the apparatus in accordance with the invention without changing the running speed of the machine. A substantial and significant advantage is also that the apparatus is very simple in its construction and
15 in its mode of implementation and that it can be connected by very simple operations to existing structures for the purpose of damping vibrations. The further advantages and characteristic features of the invention will become apparent from the following detailed description of the invention.

20 In the following, the invention will be described by way of example with reference to the figures in the accompanying drawing.

Figure 1 schematically depicts a size press or a coating machine of the size press type to which the apparatus in accordance with the invention can be applied.

25

Figure 2 shows in schematic form one example of the apparatus in accordance with the invention.

Figure 3 is a fully schematic illustration of an advantageous mode of tuning a
30 damper.

Figure 4 is an illustration corresponding to that of Fig. 2 of another example of the apparatus in accordance with the invention.

Figure 5 shows a further embodiment example of the apparatus.

5

Figure 6 shows an embodiment of the invention in which a special locking means is used for an additional weight of a damper.

10 Figures 7A and 7B are more detailed sectional views of the locking means shown in Fig. 6.

Figure 8 is finally a schematic view of a damper in which a memory metal material is used in the spring of the damper.

15 Fig. 1 has been included merely to illustrate one possible application of the invention and, thus, Fig. 1 shows a size press or equivalent, which is generally denoted with the reference numeral 10. The size press 10 comprises a frame 14 on which a first size press roll 11 has been mounted directly by means of bearing housings 12. In the illustration of Fig. 1, said roll 11 is provided with a soft roll coating 13. Loading
20 arms 16 have been mounted pivotally on the frame 14 of the size press by means of a pivot shaft 15 extending in the cross direction of the machine, on support of which loading arms a second roll 1 defining a nip N with the first roll 11 has been mounted at its bearing housings 2. For the purpose of providing a desired linear load in the nip N, the loading arms 16 are loaded by means of hydraulic cylinders 17, by whose
25 means the nip N may also be opened. The reference signs 18 and 19 designate coating units by whose means a coating material, such as size, pigment coating material or equivalent is applied to the surface of the rolls. In a normal way, a web W is passed through the nip N.

30 When a seam or some other equivalent thicker part travels through the nip N in the size press shown in Fig. 1, the coating 13 is deformed and it functions as a spring, with the result that the apparatus, in particular the roll 1 pivotally mounted on the

frame 14, begins to vibrate. Vibration deforms the roll coating 13 further, where-
upon the vibration is intensified and the roll 1 is brought to a resonating state. In
conventional arrangements, this has led to the fact that it has been necessary to
change the running speed because it has not been possible to dampen the vibration
5 otherwise. In the invention, however, the damping of vibration has been taken care
of such that a dynamic damper that is automatically tuned in accordance with the
invention is mounted on the bearing housing 2 of the vibrating roll 1, which damper
is illustrated in more detail in Fig. 2 of the drawing.

10 As shown in Fig. 2, the apparatus in accordance with the invention is in its principle
very simple. In principle, the invention is constituted by a dynamic damper known
per se and fitted on a vibrating system, i.e. in this case on the bearing housing 2 of
the roll 1, which damper comprises a mass 4 suspended from the vibrating system
2 by means of a spring 3. In the illustration of Fig. 2, the spring is a rod 3 rigidly
15 fitted on the bearing housing 2 by means of attachment members 5, which rod is
additionally provided with threads in the example of the figure. As the mass serves
a weight 4 which is fitted on the rod 3 and which can be displaced by means of the
threads in the longitudinal direction of the rod 3 such that the distance a of the
weight 4 from the bearing housing 2 can be regulated. As already stated once above,
20 the damper is thus a dynamic damper known per se. The basic equation of
dimensioning the dynamic damper is simply:

$k/m = \Omega^2$ where k = the spring constant of the spring, i.e. the rod 3 in this case,
 m = the mass of the weight 4, and Ω = the angular velocity of the vibrating system,
i.e. the bearing housing 2.

25

The effect of the dynamic damper is based in one advantageous embodiment of the
invention on the fact that the natural frequency of said damper is tuned so as to be
equal to the problematic excitation frequency. In this connection, it shall be pointed
out that there may be several problematic excitation frequencies that differ from one
30 another, but in one example which employs a coating machine of the size press type
like the one shown in Fig. 1 there was a so-called lower problem frequency, in
which the motion of bearing housings was large, of the order of about 50 Hz. Since

the effective damping capacity of the dynamic damper is, however, limited to a relatively narrow frequency band, it is clear that it must be possible to regulate the natural frequency of the damper. As it is commonly known that, for example, in the case shown in Fig. 2, the spring constant k of the rod 3 is inversely proportional to the power of three of the length of the rod, it is easy to regulate the natural frequency of the damper by adjusting the distance a of the weight 4 from the bearing housing 2. When the natural frequency of the damper has been made equal to the problematic excitation frequency by changing the distance a , the bearing housing 2 ceases to vibrate and the weight 4 resting on support of the rod 3 begins to vibrate, respectively. This means that the arrangement formed by means of an additional spring, i.e. the rod 3, and an additional weight, i.e. the weight 4, produces a force that is in an opposite phase and of equal magnitude to the excitation, whereby the vibration of the machine itself ceases.

As already stated above, a vibrating system or an equivalent object may have several problematic excitation frequencies because, depending on the system, it may include several devices which vibrate at different frequencies. For example, in the size press arrangement described previously, a significant source of vibration in the system is a vibrating roll. In this kind of example, the natural frequency of the vibrating system is not necessarily equal to a multiple of the rotational frequency of the roll inducing the vibration (in most instances this is not the case). In that connection, a very effective way of damping the vibrations of the system is that the damper, for example, a damper of the kind illustrated in Fig. 2, is tuned to a frequency which corresponds to a multiple of the rotational frequency of the roll that is closest to the natural frequency of the vibrating system. This multiple of the rotational frequency is thus used as the tuning frequency of the damper. This is illustrated fully schematically in Fig. 3, which shows the relation between the natural frequency of a vibrating system and multiples of the rotational frequency of a roll in a frequency/amplitude coordinate system.

If the device in question were a device that is operated continuously at a constant speed, the vibrations could be brought under control merely by tuning the natural

frequency of the dynamic damper once to a correct level. However, in the paper machine application, the running speeds and thus the vibration frequencies too vary. Consequently, it must be possible to regulate the dynamic damper fairly precisely. In the inventive arrangement shown in Fig. 2, adjustability is provided such that the bearing housing 2 whose vibration is desired to be damped is provided with a vibration detector 6. The vibration detector 6 transmits a signal that is amplified by an amplifier 7 and passed further to a computer 8 serving as a vibration analyser, which filters and analyses the vibration frequencies and locates the problematic excitation frequency among the frequencies and converts it into a control signal and transmits said control signal to a control device 9 which moves the weight 4 on the rod 3. The control device 9 is advantageously, for example, a stepping motor. The apparatus thus comprises a closed control circuit that constantly measures and analyses vibrations and, based on this, regulates the natural frequency of the dynamic damper.

The illustration of Fig. 4 corresponds to that of Fig. 2 so that this example also uses a vibration detector 6 that measures and identifies the vibrations of a bearing housing 2 and transmits in accordance therewith a signal that is amplified by an amplifier 7 and passed further to a vibration analyser 8. The vibration analyser 8 converts the problematic excitation frequency it has found from the vibration frequencies analysed by it into a control signal and transmits it to a control device 9. The dynamic damper differs in this example from the one described previously such that the damper comprises a spring 3a which is suspended from the bearing housing 2 and from which a weight 4a is suspended whose mass can be changed. The spring 3a itself is here constant in length. The weight 4a comprises, for example, as shown in Fig. 3, a container and a liquid in said container, the amount of said liquid being regulated by means of a pump 21 and a valve 22. The container is denoted with the reference sign 23. The control device 9 thus controls said pump 21 and valve 22 based on the control signal received by it in order to change the amount of the liquid in the container of the weight 4a.

Fig. 5 shows a further embodiment of the invention which differs from the ones described previously. In this embodiment, the spring 3b of the dynamic damper comprises a rod that is mounted and attached to a bearing housing 2 in a way corresponding to the illustration of Fig. 2. The weight 4b of the damper in turn corresponds in structure and in operation to the illustration of Fig. 3 so that it comprises a container and a liquid therein whose amount is regulated by means of a pump 21 and a valve 22. In the illustration of Fig. 5, the weight 4b is, however, suspended from the spring 3b such that its distance a from the bearing housing 2 can be changed, for example, in a way corresponding to that shown in Fig. 2. Accordingly, both the distance a of the weight 4b from the bearing housing 2 and the mass of the weight 4b are regulated in the illustration of Fig. 5.

Fig. 6 shows an embodiment of the apparatus in accordance with the invention which is provided with a locking means 30 by whose means an additional weight 4 can be locked in place on the rod 3. In accordance with the embodiments described above, the rod 3 serving as the spring of the dynamic damper is attached to a vibrating system 2, such as, for example, a bearing housing by means of suitable attachment members 5. Fig. 6 further shows that the rod 3 is provided with threads 3' and, in a similar way, the additional weight is provided with threads matching said threads 3' so that said additional weight may be moved on the rod 3 by rotating, i.e. by "screwing". Once the additional weight 4 has been brought to a correct place on the rod 3, it is locked in place by means of the locking means 30, which produces a force in the axial direction of the rod 3 in order to provide a frictional force necessary for locking between the rod 3 and the additional weight 4. As shown in Fig. 6, the locking means 30 is preferably attached to a free outer end of the rod 3. In Fig. 6, the locking means 30 is shown in a free position, in which connection the additional weight 4 can be moved by rotating on the rod 3. The structure and operation of the locking means 30 is illustrated in more detail in schematic sectional views 7A and 7B.

Figs. 7A and 7B thus show the structure of the locking means 30 in more detail. Fig. 7A shows the locking means 30 in a free position corresponding to that of Fig.

6 and, correspondingly, in Fig. 7B, the locking means 30 is shown in a locking position. The locking means 30 comprises a cylindrical casing 31 which confines within it a cavity that serves as a pressure space 32. A piston 33 is disposed in this pressure space 32 and sealed by means of seals against the inner wall of the casing 31, said piston 33 being telescopic in the illustrated embodiment comprising telescopic parts 34. The piston 33 is attached to the rod 3, preferably in the fashion shown in Figs. 7A and 7B to the outer end of the rod 3 immovably, and the cylindrical casing 31 of the locking means 30 is thus fitted axially movably on the piston 33 and on the rod 3. The piston 33 divides the pressure space 32 in the axial direction in two parts, which are both provided with a connecting member 36, 37 for feeding in a pressure medium. Compressed air is preferably used as the pressure medium. Depending on the side of the piston 33 into which the pressure medium is passed, the locking means is brought either to the free position shown in Fig. 7A or to the locking position shown in Fig. 7B. In the locking position, the casing 31 of the locking means 30 has been displaced so that the end face 35 of the casing facing the additional weight 4 lies against said additional weight. The additional weight 4 is shown in Figs. 7A and 7B only partially and schematically. When the pressure medium is conducted through the connecting member 37 into the pressure space of the locking means 30, an axial force needed for locking is produced, which force provides a frictional force of required magnitude between the thread 3' on the rod 3 and the matching thread on the additional weight 4.

Finally, Fig. 8 shows fully schematically an alternative of the invention where the spring of the dynamic damper, i.e. the rod 3, is made of memory metal. The coefficient of elasticity of memory metal is highly dependent on temperature. In that case, the natural frequency of the damper can be tuned to a right level by regulating the temperature of the rod 3. Regulation of temperature can be performed, for example, by means of electric resistors or equivalent heaters. In this kind of arrangement, an additional weight 4 can be attached to the rod 3 totally rigidly and without a clearance, for example, by welding. The structure may thus be made fairly simple. Regarding memory metals, it may be stated that they are alloys of different metals, of which an alloy of nickel and titanium may be mentioned as one example.

The properties of such an alloy may be regulated by introducing into it a sufficient amount of energy in the form of heating, with the result that the crystal structure of the metal alloy can be changed by this introduction of additional energy. Memory metal "remembers" the change which a certain heating operation brings about in the metal alloy.

It is also conceivable that the dynamic damper is applied in connection with hollow tubular rolls, for example, such that the dynamic damper is disposed inside a roll tube. In this case, the dynamic damper might comprise two or more springs which are fixed to the inner surface of the roll tube while the weight of the dynamic damper is fixed on support of said springs. However, it may be considered that it is more difficult to provide adjustability for this kind of damper than in the examples described previously.

The invention has been described above in connection with a size press and a coating machine of the size press type in particular. However, problems of the similar type are also encountered, inter alia, in soft calenders and in supercalenders, and the apparatus in accordance with the invention may also be applied to them. The problematic excitation frequencies differ, however, in these applications both from one another and from the arrangement shown in Fig. 1.

Above, the invention has been described by way of example with reference to the figures in the accompanying drawing. The invention is, however, not confined to relating only to the examples illustrated in the figures, but different embodiments of the invention may vary within the scope of the inventive idea defined in the accompanying claims.

Claims

1. A method for damping vibration in a paper machine or in a paper finishing device by means of a dynamic damper which comprises an additional weight
5 suspended from a vibrating system by means of a spring, **characterized** in that, in the method, the spring constant of the spring (3,3b) of the dynamic damper and/or the mass (4a, 4b) of the dynamic damper is/are changed by means of a control device (9) in order to tune the natural frequency of the dynamic damper.
- 10 2. A method as claimed in claim 1, **characterized** in that the vibration induced by rolls (1, 11) which are in nip contact is damped by means of the dynamic damper so that the damper is tuned to a frequency that is substantially equal to a multiple of the rotational frequency of the roll that is closest to the natural frequency of the vibrating system.
- 15 3. A method as claimed in claim 1, **characterized** in that the dynamic damper is tuned to a frequency that substantially corresponds to the problematic excitation frequency of the vibrating system.
- 20 4. A method as claimed in any one of the preceding claims, **characterized** in that, in the method, the vibration frequencies of the vibrating system (2) are measured constantly by means of one or more vibration detectors (6), the measurement signals given by the vibration detector (6) are amplified by means of an amplifier (7) and fed into a vibration analyser (8), which identifies the problematic excitation frequency and converts said problematic excitation frequency into a control signal,
25 which is fed into a control device (9) in order to tune the dynamic damper.
5. A method as claimed in any one of the preceding claims wherein the spring of the dynamic damper is a rod (3) attached at one end thereof to the vibrating object,
30 **characterized** in that the spring constant is changed by changing the position of the additional weight (4) on the rod (3).

6. A method as claimed in claim 5, **characterized** in that when the tuning frequency of the dynamic damper has been made as desired, the additional weight (4) is locked in place on the rod (3) by means of a locking means (30).

5 7. A method as claimed in claim 6, **characterized** in that the locking means (30) is operated by means of compressed air.

8. A method as claimed in any one of claims 1 to 4, **characterized** in that a rod (3) made of memory metal is used as the spring of the dynamic damper.

10

9. A method as claimed in claim 8, **characterized** in that the natural frequency of the damper is tuned to a correct level by regulating the temperature of the rod made of a memory metal material.

15 10. A method as claimed in claim 9, **characterized** in that the temperature of the rod is regulated by means of electric resistors or equivalent heaters.

11. An apparatus for damping vibration in a paper machine or in a paper finishing device by means of a dynamic damper which comprises an additional weight (4, 4a, 20 4b) suspended from a vibrating system (2) by means of a spring (3, 3a, 3b), **characterized** in that the apparatus comprises a control device (9) which is arranged to change the spring constant of the spring (3, 3b) of the dynamic damper and/or the mass (4a, 4b) of the dynamic damper in order to tune the natural frequency of the dynamic damper.

25

12. An apparatus as claimed in claim 11, **characterized** in that the apparatus is fitted to dampen the vibration induced by rolls (1, 11) forming a nip such that the control device (9) is arranged to tune the damper to a frequency that is substantially equal to a multiple of the rotational frequency of the roll that is closest to the natural 30 frequency of the vibrating system.

13. An apparatus as claimed in claim 11, **characterized** in that the control device (9) is arranged to tune the damper to a frequency that substantially corresponds to the problematic excitation frequency of the vibrating system.

5 14. An apparatus as claimed in any one of claims 11 to 13, **characterized** in that the apparatus comprises one or more vibration detectors (6) which measure(s) the vibration frequencies of the vibrating system (2) constantly and which is/are arranged to transmit a measurement signal, an amplifier (7) that amplifies the measurement signal, a vibration analyser (8) which is arranged to receive the
10 measurement signal transmitted by the vibration detector (6) and amplified by the amplifier (7), to identify the problematic excitation frequency from said signal and to convert said problematic excitation frequency into a control signal to be fed into the control device (9) in order to tune the dynamic damper.

15 15. An apparatus as claimed in any one of claims 11 to 14, **characterized** in that the spring (3, 3b) of the dynamic damper is a rod fixed at one end thereof to the vibrating system (2) in a substantially horizontal direction, on support of which rod the additional weight (4,4b) is mounted, and that the control device (9) is arranged to change the spring constant of the spring (3,3b) of the dynamic damper by
20 changing the position of the additional weight (4,4b) on the rod (3,3b).

16. An apparatus as claimed in claim 15, **characterized** in that a locking means (30) is mounted on the rod (3) serving as the spring of the damper in order to lock the additional weight (4) in place when the tuning frequency of the damper has been
25 made as desired.

17. An apparatus as claimed in claim 15 or 16, **characterized** in that the rod (3) and the additional weight (4) fitted on the rod are provided with matching threads (3'), and that the position of the additional weight (4) on the rod (3) can be regulated
30 by rotating said additional weight on the rod.

18. An apparatus as claimed in claim 17, **characterized** in that the locking means (30) is arranged to act in the axial direction of the rod (3) and to produce an axial force acting on the additional weight (4) in order to provide a frictional force necessary for locking between the matching threads on the rod (3) and on the additional weight (4).

19. An apparatus as claimed in any one of claims 16 to 18, **characterized** in that the locking means (30) is a piston device fixed onto the rod.

20. An apparatus as claimed in claim 19, **characterized** in that the piston device (30) is telescopic in order to provide the necessary stroke length.

21. An apparatus as claimed in any one of claims 16 to 20, **characterized** in that the locking means (30) is operated by compressed air.

22. An apparatus as claimed in any one of claims 11 to 21, **characterized** in that the additional weight (4a,4b) included in the dynamic damper comprises a container suspended from the spring (3a,3b) and filled with a liquid, the amount of the liquid in said container being adjustable in order to regulate the mass.

23. An apparatus as claimed in claim 22, **characterized** in that the control device (9) is connected to a pump (21) and to a valve (22) in order to regulate the amount of the liquid.

24. An apparatus as claimed in any one of claims 11 to 23, **characterized** in that the control device (9) comprises a stepping motor or equivalent in order to change the location of the mass of the dynamic damper.

25. An apparatus as claimed in any one of claims 11 to 24, **characterized** in that the apparatus is fitted so as to dampen vibration in a nip in which at least one of the rolls forming the nip is provided with a soft coating (9).

26. An apparatus as claimed in any one of claims 11 to 25, **characterized** in that the dynamic damper and the vibration detectors (6) are fitted and fixed to the bearing housing (2) of the roll.

5 27. An apparatus as claimed in any one of claims 11 to 14, 25 to 26, **characterized** in that the spring of the dynamic damper is a rod (3) made of memory metal.

28. An apparatus as claimed in claim 27, **characterized** in that the natural frequency of the damper is arranged to be tuned by regulating the temperature of the
10 rod made of a memory metal material.

29. An apparatus as claimed in claim 28, **characterized** in that, in order to regulate the temperature of the rod, the apparatus is provided with electric resistors or equivalent heaters.

15

30. An apparatus as claimed in any one of claims 27 to 29, **characterized** in that the additional weight (4) is fixed to the rod (3) rigidly and without a clearance.

AMENDED CLAIMS

[received by the International Bureau on 29 September 1998 (29.09.98);
original claims 1-30 replaced by new claims 1-26 (5 pages)]

1. A method for damping vibration induced by rolls forming a nip in a paper machine or in a paper finishing device by means of a dynamic damper which
5 comprises an additional weight suspended from a vibrating system by means of a spring, whereby in the method, the spring constant of the spring (3,3b) of the dynamic damper and/or the mass (4a, 4b) of the dynamic damper is/are changed by means of a control device (9) in order to tune the natural frequency of the dynamic damper, **characterized** in that the vibration induced by rolls (1, 11) which are in nip
10 contact is damped by means of the dynamic damper so that the damper is tuned to a frequency that is substantially equal to a multiple of the rotational frequency of the roll that is closest to the natural frequency of the vibrating system, or to a frequency that substantially corresponds to the problematic excitation frequency of the vibrating system.
- 15
2. A method as claimed in claim 1, **characterized** in that, in the method, the vibration frequencies of the vibrating system (2) are measured constantly by means of one or more vibration detectors (6), the measurement signals given by the vibration detector (6) are amplified by means of an amplifier (7) and fed into a
20 vibration analyser (8), which identifies the problematic excitation frequency and converts said problematic excitation frequency into a control signal, which is fed into a control device (9) in order to tune the dynamic damper.
3. A method as claimed in claim 1 or 2 wherein the spring of the dynamic damper
25 is a rod (3) attached at one end thereof to the vibrating object, **characterized** in that the spring constant is changed by changing the position of the additional weight (4) on the rod (3).
4. A method as claimed in claim 3, **characterized** in that when the tuning frequency of the dynamic damper has been made as desired, the additional weight (4)
30 is locked in place on the rod (3) by means of a locking means (30).

5. A method as claimed in claim 4, **characterized** in that the locking means (30) is operated by means of compressed air.

6. A method as claimed in claim 1 or 2, **characterized** in that a rod (3) made of memory metal is used as the spring of the dynamic damper.

7. A method as claimed in claim 6, **characterized** in that the natural frequency of the damper is tuned to a correct level by regulating the temperature of the rod made of a memory metal material.

8. A method as claimed in claim 7, **characterized** in that the temperature of the rod is regulated by means of electric resistors or equivalent heaters.

9. An apparatus for damping vibration induced by rolls forming a nip in a paper machine or in a paper finishing device by means of a dynamic damper which comprises an additional weight (4, 4a, 4b) suspended from a vibrating system (2) by means of a spring (3, 3a, 3b), said apparatus further comprising a control device (9) which is arranged to change the spring constant of the spring (3, 3b) of the dynamic damper and/or the mass (4a, 4b) of the dynamic damper in order to tune the natural frequency of the dynamic damper, **characterized** in that the apparatus is fitted to dampen the vibration induced by rolls (1, 11) forming a nip such that the control device (9) is arranged to tune the damper to a frequency that is substantially equal to a multiple of the rotational frequency of the roll that is closest to the natural frequency of the vibrating system, or to a frequency that substantially corresponds to the problematic excitation frequency of the vibrating system.

10. An apparatus as claimed in claim 9, **characterized** in that the apparatus comprises one or more vibration detectors (6) which measure(s) the vibration frequencies of the vibrating system (2) constantly and which is/are arranged to transmit a measurement signal, an amplifier (7) that amplifies the measurement signal, a vibration analyser (8) which is arranged to receive the measurement signal transmitted by the vibration detector (6) and amplified by the amplifier (7), to

identify the problematic excitation frequency from said signal and to convert said problematic excitation frequency into a control signal to be fed into the control device (9) in order to tune the dynamic damper.

5 11. An apparatus as claimed in claim 9 or 10, **characterized** in that the spring (3, 3b) of the dynamic damper is a rod fixed at one end thereof to the vibrating system (2) in a substantially horizontal direction, on support of which rod the additional weight (4,4b) is mounted, and that the control device (9) is arranged to change the spring constant of the spring (3,3b) of the dynamic damper by changing the position
10 of the additional weight (4,4b) on the rod (3,3b).

12. An apparatus as claimed in claim 11, **characterized** in that a locking means (30) is mounted on the rod (3) serving as the spring of the damper in order to lock the additional weight (4) in place when the tuning frequency of the damper has been
15 made as desired.

13. An apparatus as claimed in claim 11 or 12, **characterized** in that the rod (3) and the additional weight (4) fitted on the rod are provided with matching threads (3'), and that the position of the additional weight (4) on the rod (3) can be regulated
20 by rotating said additional weight on the rod.

14. An apparatus as claimed in claim 13, **characterized** in that the locking means (30) is arranged to act in the axial direction of the rod (3) and to produce an axial force acting on the additional weight (4) in order to provide a frictional force
25 necessary for locking between the matching threads on the rod (3) and on the additional weight (4).

15. An apparatus as claimed in any one of claims 12 to 14, **characterized** in that the locking means (30) is a piston device fixed onto the rod.
30

16. An apparatus as claimed in claim 15, **characterized** in that the piston device (30) is telescopic in order to provide the necessary stroke length.

17. An apparatus as claimed in any one of claims 12 to 16, **characterized** in that the locking means (30) is operated by compressed air.

18. An apparatus as claimed in any one of claims 9 to 17, **characterized** in that the
5 additional weight (4a,4b) included in the dynamic damper comprises a container suspended from the spring (3a,3b) and filled with a liquid, the amount of the liquid in said container being adjustable in order to regulate the mass.

19. An apparatus as claimed in claim 18, **characterized** in that the control device
10 (9) is connected to a pump (21) and to a valve (22) in order to regulate the amount of the liquid.

20. An apparatus as claimed in any one of claims 9 to 19, **characterized** in that the
15 control device (9) comprises a stepping motor or equivalent in order to change the location of the mass of the dynamic damper.

21. An apparatus as claimed in any one of claims 9 to 20, **characterized** in that the
apparatus is fitted so as to dampen vibration in a nip in which at least one of the
rolls forming the nip is provided with a soft coating (9).
20

22. An apparatus as claimed in any one of claims 9 to 21, **characterized** in that the
dynamic damper and the vibration detectors (6) are fitted and fixed to the bearing
housing (2) of the roll.

23. An apparatus as claimed in any one of claims 9, 10, 21 or 22, **characterized**
25 in that the spring of the dynamic damper is a rod (3) made of memory metal.

24. An apparatus as claimed in claim 23, **characterized** in that the natural frequency of the damper is arranged to be tuned by regulating the temperature of the
30 rod made of a memory metal material.

25. An apparatus as claimed in claim 24, **characterized** in that, in order to regulate the temperature of the rod, the apparatus is provided with electric resistors or equivalent heaters.
- 5 26. An apparatus as claimed in any one of claims 23 to 25, **characterized** in that the additional weight (4) is fixed to the rod (3) rigidly and without a clearance.

